## EL-2632 EL SERIES SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM



#### **STANDARD FEATURES**

- ▶ Electric drive
- ▶ Drive at full height indoor & outdoor
- ▶ 110V power-to-platform
- Proportional controls
- > 30A Charger
- Non-slip deck
- ▶ All motion alarm
- ▶ Flashing beacon
- ▶ Removable platform controls
- Self-locking gate
- Liftable with forklift or crane

- ▶ Dual Maintenance bars
- ▶ Onboard diagnostic system
- Manual decent cable
- Active tilt alarm
- ▶ Slide out extension
- ▶ Automatic pothole protection
- Non-marking tires
- ▶ Horn
- ► CAN communication protocol
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

### STANDARDS COMPLIANCE

NSI A92.20

#### **OPTIONS**

- ▶ Tool Tray
- ▶ Pipe Rack

# PRELIMINARY BROCHURE SUBJECT TO CHANGE




#### **EL SERIES**

Battery

#### SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

JLLI	TROPELLED MODILE ELEVATED WORK PLATFO	21(1-1	
SPE	CIFICATIONS		
A	Working Height (2 Person Indoor/1 Person Outdoor)	32.3ft	10 m
В	Platform Height Maximum (2 Preson Indoor/1 Person Outdoor)	26.3 ft	8 m
С	Platform Height Minimum	47.6 in	1.21 m
D	Ground Clearance Elevated	0.79 in	2 cm
E	Ground Clearance Lowered	3.5 in	9 cm
F	Overall Length w/ Step	97.3 in	2.47 m
G	Width	31.5 in	0.8 m
Н	Stowed Height (Rails Unfolded)	91 in	2.31 m
	Stowed Height (Rails Folded)	71 in	1.8 m
-1	Platform Length	91 in	2.32 m
J	Platform Width	33.5 in	0.85 m
K	Slide Out Extension Deck Length	34 in	0.86 m
	Wheelbase	73.2 in	1.86 m
	Tires	15 x 5 in	38 x 12.7 cm
PER	FORMANCE		
Rated Occupancy (Indoor/Outdoor)		2/1	
Platform Capacity		529 lbs	240 kg
Slide Out Extension Deck Capacity		265 lbs	120 kg
Gradeability		25%	
Inside Turn Radius		0 in	0 cm
Drive Speed Elevated		0.4 mph	0.6 km/h
Drive Speed Lowered		2.8 mh	4.5 km/h
Working Slope		2°/3°	
Lift Speed (Up/Down)		44/38 s	
Weight		4486 lbs	2035 kg
POV	VER		
Hydraulic Tank Capacity		6.6 gal	25 L

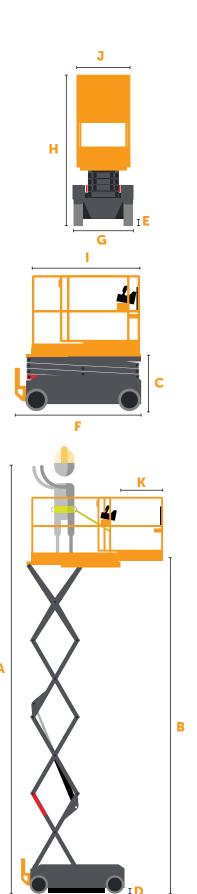

4 x 6V 225 Ah