ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM



THE ULTIMATE COMPACT LIFT WITH PRECISION MANEUVERABILITY...

STANDARD FEATURES

- Proportional controls
- ▶ Electric drive & steer
- ▶ 110V-AC power-to-platform
- USB ports
- ▶ Horn
- Maintenance charger
- ▶ Total Control Drive System
- ▶ Hour meter
- Manual descent pull cable
- Active tilt alarm
- Active load-sensing
- ▶ Low floor load pressures

- Pothole protection
- Forklift pockets
- ▶ Zero-turn radius
- EZ-glide slide out
- > 25% gradeability
- ▶ Solid rubber, non-marking wheels
- ▶ Lanyard attach points
- ▶ No folding rails
- ▶ Locking front wheel casters
- ▶ Removable platform controls
- Cantilever gate
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

OPTIONS

- ▶ Flashing beacon
- ▶ Inverter
- All motion alarm

STANDARDS COMPLIANCE

- NSI A92.20
- CSA B354.6:17






ZT-1230


ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

SPECIFICATIONS			
A	Working Height (1 Person Indoor)	18 ft	5.5 m
В	Platform Height Maximum (1 Person Indoor)	12 ft	3.7 m
C	Platform Height Minimum	21 in	53.3 cm
D	Ground Clearance Elevated	0.5 in	1.3 cm
Ε	Ground Clearance Lowered	3.6 in	9.1 cm
F	Overall Length w/ Step	62 in	157.5 cm
G	Overall Width	30 in	76.2 cm
Н	Stowed Height	65 in	165.1 cm
- 1	Platform Length	53 in	134.6 cm
J	Platform Width	24 in	61 cm
K	Slide Out Extension Deck Length	30 in	76.2 cm
	Tires (Front/Rear)	8/12 in	20.3/30.5 cm
PERFORMANCE			
Rated Occupancy (Indoor)		1 Person	
Platform Capacity		650 lbs	294.8 kg
Slide Out Extension Deck Capacity		250 lbs	113.4 kg
Gradeability		25%	
Inside Turn Radius		Zero	
Drive Speed Elevated (Proportional)		0.9 mph	0.4 m/s
Drive Speed Lowered (Proportional)		2.7 mph	1.2 m/s
Lift Speed (Up/Down)		18/18 sec	
Power Source		24V DC	
FLC	OR LOADING		
Weight		1675 lbs	759.8 kg
Wheel Load at Minimum Capacity		134.9 psi	930.1 kPa
Whe	eel Load at 500 lbs Capacity	166.6 psi	1148.7 kPa





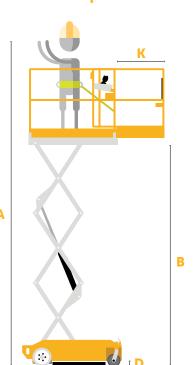

1223.8 kPa

177.5 psi



Wheel Load at Maximum Capacity

